

TACO

2024 EDITION

PERFORM 300

WOOD SERIES

Wear Layer	0.2mm	Size	152.4mm x 914.4mm
Thickness	3.0mm	24 pieces/box	3.34sqm



TV 3013 White Oak



TV 3003 Washed Oak



TV 3031 Charleston Teak



TV 3015 Vicenza Elm



TV 3030 Butternut Teak



TV 3005 Vintage Oak

WOOD SERIES

Wear Layer	0.2mm	Size	152.4mm x 914.4mm
Thickness	3.0mm	24 pieces/box	3.34sqm



TV 3010 Warm Cherry



TV 3048 Chicago Oak **NEW**



TV 3047 Sierra Oak **NEW**



TV 3029 Summer Teak



TV 3008 Sand Malmo



TV 3014 Natural Beech

WOOD SERIES

Wear Layer	0.2mm	Size	152.4mm x 914.4mm
Thickness	3.0mm	24 pieces/box	3.34sqm



TV 3004 Parma Oak



TV 3017 Original Cherry



TV 3007 Merbau Wood



TV 3020 Bailey Acacia



TV 3021 Scottish Applewood

Perform 300 is a high quality Luxury Vinyl Flooring for your commercial and residential spaces. With our wide range of natural wood and stone patterns, **Perform 300** is the perfect solution for your beautiful flooring needs.

FLOOR VIEW

Choose and see how it looks in your room.




STONE SERIES

Wear Layer **0.2mm**
Thickness **3.0mm**

Size **304.8mm x 609.6mm**
18 pieces/box **3.34sqm**



TV 3024 Grey Slate

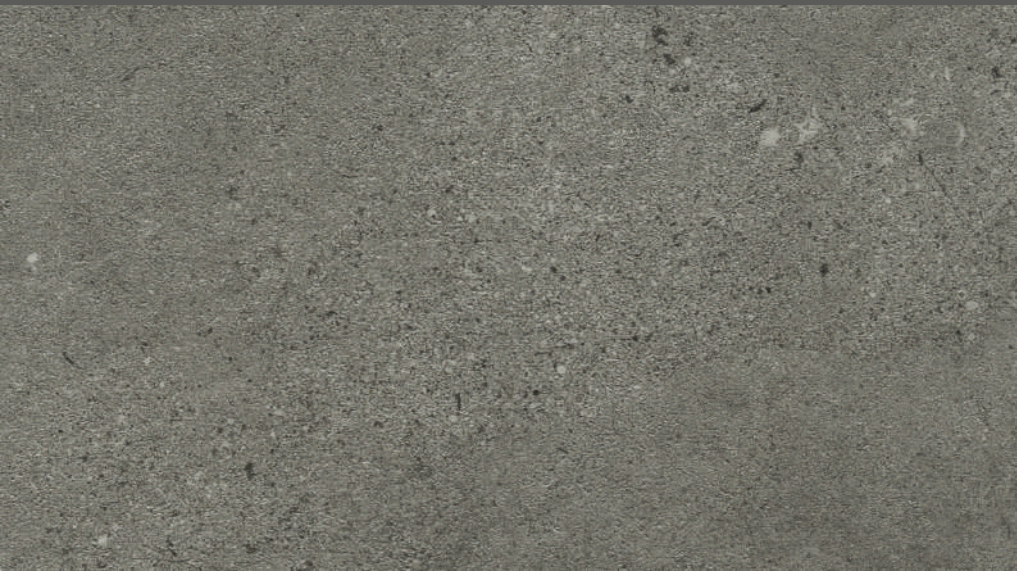

TV 3026 Stone



TV 3032 Natural Sand




TV 3033 Gray Sand

Size **457.2mm x 457.2mm**

16 pieces/box **3.34sqm**



TV 3027 Mozaic - Natural

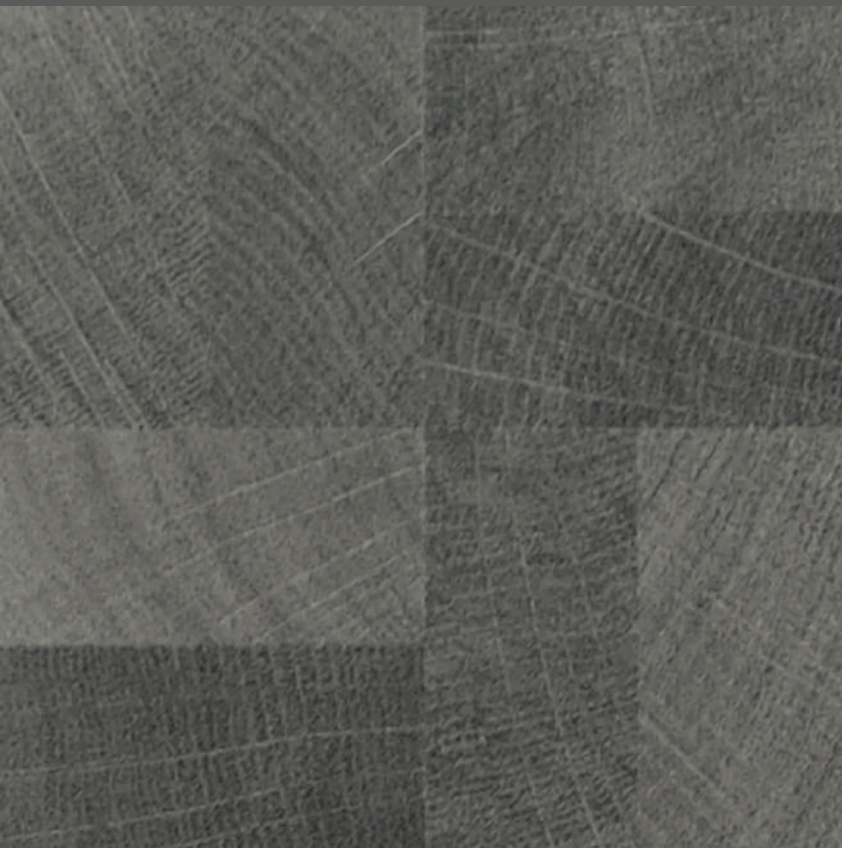

TV 3028 Mozaic - Grey



TV 3024

TECHNICAL DATA

CHARACTERISTICS	TEST METHOD	PASS
Resistance to chemicals	EN423:93 Class 0	✓
Bearing castor	EN425:94	✓
Dimension squareness and straightness	EN427:94	✓
Thickness overall	EN429:93	✓
Thickness wear layer	EN429:93	✓
Residual indentation after static load	EN433:94	✓
Dimensional stability and curling after exposure to heat	EN434:94	✓
Shrinkage rate	≤0.25%	✓
Curling	≤2mm	✓
Flexibility	EN435:94(A) Bend around 20mm mandrel shows no sign of cracking	✓
Abrasion resistance	EN660-1/-2	✓
Color fastness to light	EN 20 ISO 105-B02 6 or above	✓
Toxic element test	EN 71-3	✓
Specific gravity	ASTM D792:91	✓
Coefficients of friction	ASTM D1894:01	✓
Sound reduction	DIN52210:4db	✓
Flammability	EN 71-2	✓
Smoke density	DIN4102/ASTM D2843-99:Class B1	✓
Electrical resistance	EN1081 Method C	✓
Fungus test	ASTM G21:96 Grade 1	✓
IMO resolution	MSC61[67] Part 2	✓
	MSC61[67] Part 5	✓

PRODUCED UNDER HIGH QUALITY SUPERVISION WITH **ISO 9001 ISO 14001 OHSAS 18001 CE STDS.**



100%
WATERPROOF




EASY TO CLEAN &
MAINTAIN



TERMITE
PROOF



SIMPLE & QUICK
TO INSTALL

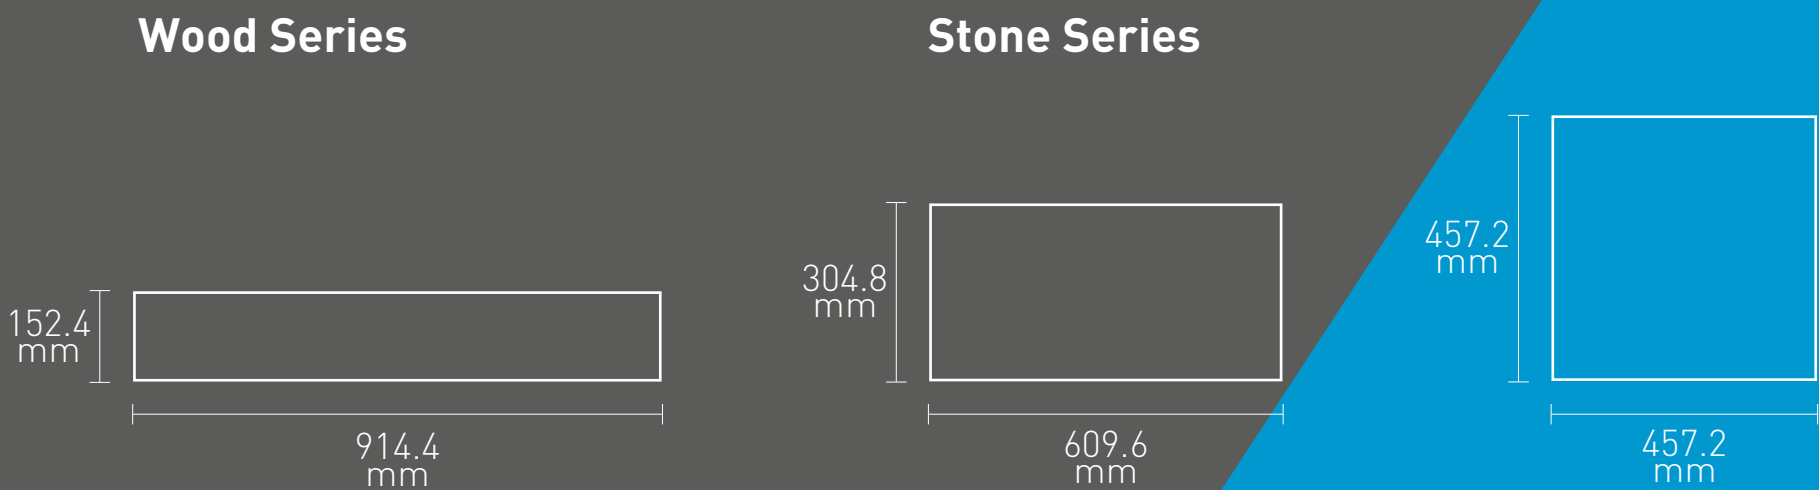



0811-905-6868

