



2024 EDITION

ULTRACORE 500 SPC

WOOD SERIES

Wear Layer	0.3mm	Size	172mm x 1210mm
Thickness	5.0mm	11 pieces/box	2.29sqm



TV 5501 SPC Tuscany Oak



TV 5520 SPC Vienna Oak NEW



TV 5521 SPC Santiago Oak NEW



TV 5507 SPC Finnish Oak




TV 5502 SPC Ottawa Oak

WOOD SERIES

Wear Layer	0.3mm	Size	172mm x 1210mm
Thickness	5.0mm	11 pieces/box	2.29sqm



TV 5503 SPC Valencia Oak

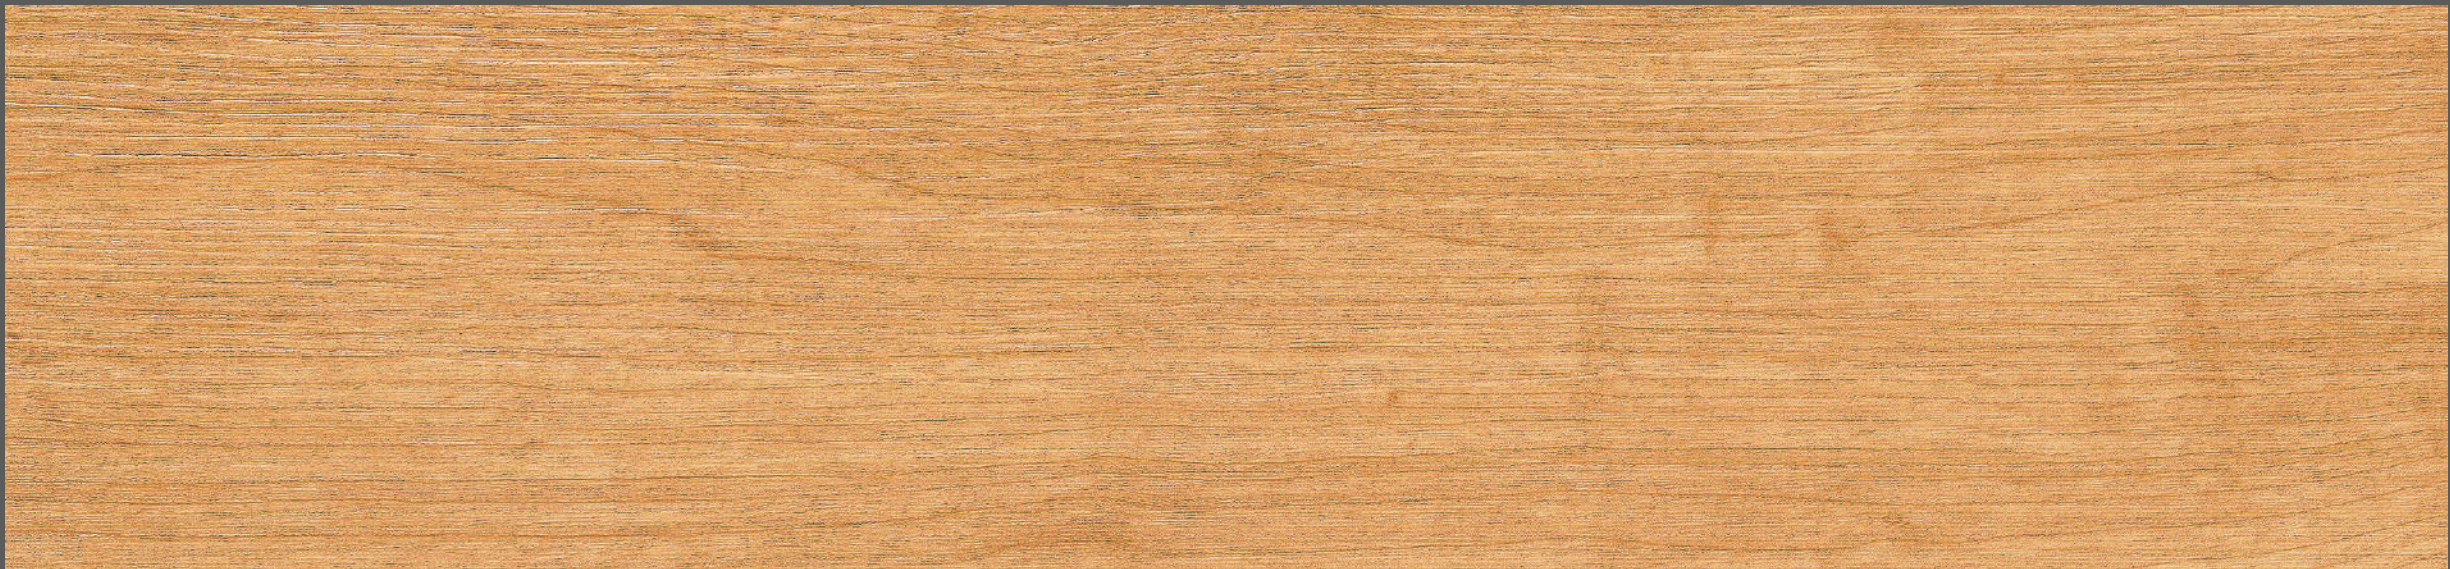

TV 5509 SPC Wild Cherry



TV 5504 SPC Golden Acacia



TV 5511 SPC Ontario Hickory



TV 5505 SPC Carson Oak

WOOD SERIES

Wear Layer	0.3mm	Size	172mm x 1210mm
Thickness	5.0mm	11 pieces/box	2.29sqm



TV 5510 SPC Canyon Oak



TV 5506 SPC Glenmore Oak




TV 5508 SPC Madeira Walnut



TV 5512 SPC Somerset Applewood

Built-in
1mm IXPE
Underlay

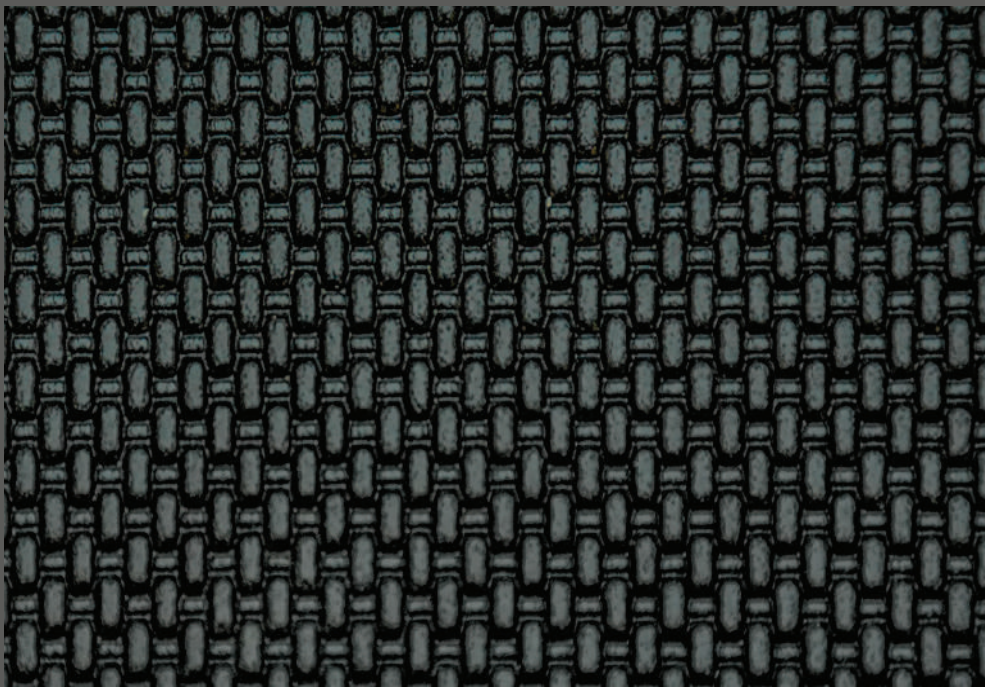

FLOOR VIEW

Choose and see how
it looks in your room.



STONE SERIES

Wear Layer **0.3mm**
Thickness **5.0mm**

Size **300mm x 600mm**
12 pieces/box **2.16sqm**



TV 5519 SPC NEW
Brown Sterling



TV 5517 SPC NEW
Grey Air



TV 5518 SPC NEW
Grey Sterling




TV 5516 SPC
Concrete



TECHNICAL DATA

CHARACTERISTICS	TEST METHOD	PASS
Overall thickness	ASTM F386-11	✓
Thickness of wear layer	ASTM F410-08 (2013)	✓
Residual indentation	ASTM F1914-07 (2011)	✓
Dimension stability	ASTM F2199-09 (2014)	✓
Resistance to chemical	ASTM F925-13	✓
Resistance to heat	ASTM F1514-03 (2013)	✓
Resistance to light	ASTM F1515-15	✓
Castor chair	NALFA LF 01-2011 : No Obvious Damage	✓
Fungi resistance	ASTM G21-15 : Rating 0, no growth	✓
Formaldehyde content	ASTM D6007-14 : Not Detected	✓
Impact resistance	DIN 51130:2014	✓
Reaction to fire	EN 13501-1	✓

PRODUCED UNDER HIGH QUALITY SUPERVISION WITH **ISO 9001 ISO 14001 OHSAS 18001 CE STDS.**



CLICK
SYSTEM



100%
WATERPROOF



EASY TO CLEAN &
MAINTAIN



0.3mm
WEAR LAYER



TERMITE
PROOF



SIMPLE & QUICK
TO INSTALL

