



# Perform 300

LUXURY VINYL  
FLOORING

NEW  
HORIZONS

TAO

# PERFORM 300 STONE SERIES

Wear Layer 0.2 mm  
Thickness 3.0 mm  
Size 304.8 mm x 609.6 mm  
18 pieces/box 3.34 sqm



**TV 3033**  
Gray Sand




**TV 3026**  
Stone



**TV 3024**  
Grey Slate



**TV 3026** Stone

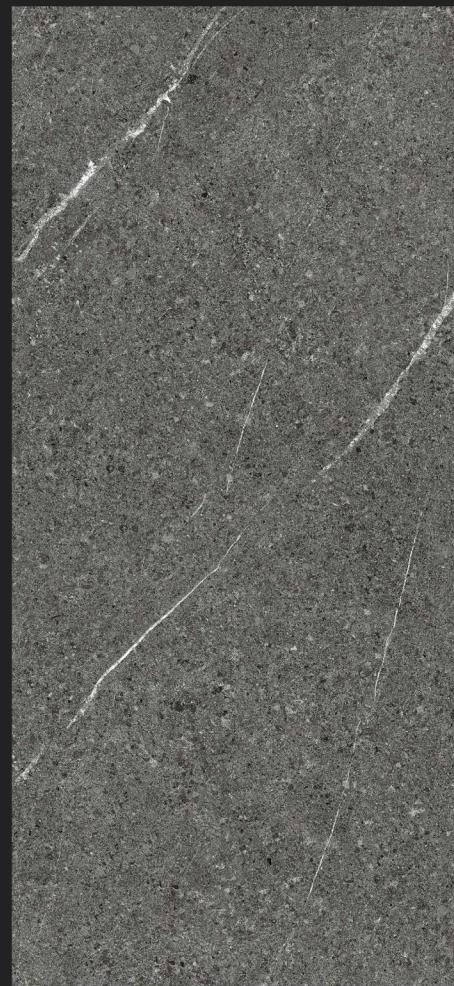

**TV 3052**  
Urban Slate **NEW**

# PERFORM 300

## WOOD SERIES

Wear Layer 0.2 mm  
Thickness 3.0 mm  
Size 152.4 mm x 914.4 mm  
24 pieces/box 3.34 sqm



**TV 3013** White Oak



**TV 3029** Summer Teak



**TV 3031** Charleston Teak



**TV 3003** Washed Oak



**TV 3008** Sand Malmo



**TV 3005** Vintage Oak

# PERFORM 300

## WOOD SERIES

Wear Layer 0.2 mm  
Thickness 3.0 mm  
Size 152.4 mm x 914.4 mm  
24 pieces/box 3.34 sqm



**TV 3015** Vicenza Elm



**TV 3047** Sierra Oak



**TV 3049** Golden Ash NEW



**TV 3010** Warm Cherry



**TV 3014** Natural Beech



**TV 3004** Parma Oak

# PERFORM 300 WOOD SERIES

Wear Layer 0.2 mm  
Thickness 3.0 mm  
Size 152.4 mm x 914.4 mm  
24 pieces/box 3.34 sqm



**TV 3051** Truffle Oak NEW



**TV 3050** Crimson Oak NEW



**TV 3017** Original Cherry



**TV 3007** Merbau Wood



**TV 3021** Scottish Applewood



**TV 3021** Scottish Applewood

# Technical Data

PROPERTY	TEST METHOD	PASS
Resistance to chemical	EN423: 93	Class 0
Bearing Castor	EN425: 94	✓
Dimension Squareness and Straightness	EN427: 94	✓
Thickness Overall	EN429: 93	✓
Thickness Wear Layer	EN429: 93	✓
Residual Indentation after Static Load	EN433: 94	✓
Dimensional Stability and Curling after Exposure to Heat	EN434: 94	✓
Shrinkage Rate	≤0,25%	✓
Curling	≤2 mm	✓
Abrasion Resistance	EN660-1 /-2	Bend around 20 mm mandrel Shows no sign of cracking
Color Fastness to Light	EN 20 ISO 105B02	6 or above
Toxic Element Test	EN 71-3	✓
Specific Gravity	ASTM D792: 91	✓
Coefficients of Friction	ASTM D1894: 01	✓
Sound Reduction	DIN52210	4 dB
Flammability	EN71-2	✓
Smoke Density	DIN4102 / ASTMD2843-99	Class B1
Electrical Resistance	EN1081 Method C	✓
Fungus Test	ASTM G21: 96	Grade 1
IMO Resolution	MSC61(67) Part 2 MSC61(67) Part 5	✓

PRODUCED UNDER HIGH QUALITY SUPERVISION WITH ISO 9001 ISO 14001 OHSAS 18001 CE STDS.



EASY TO CLEAN  
& MAINTAIN



TERMITES  
PROOF



SIMPLE & QUICK  
TO INSTALL



ANTI  
BACTERIAL



Brings natural feel and texture to life.