



Perform 300 XL

LUXURY VINYL
FLOORING

NEW
HORIZONS



TALCO

A modern office lounge with wood-paneled walls, a large window overlooking a city, and a carpeted floor with large planks. The room features a long, narrow layout with wood-paneled walls on both sides. A large window at the far end provides a view of a city skyline. Several white armchairs are arranged in the lounge area. The floor is covered in a light-colored carpet with large, rectangular planks. The ceiling has recessed lighting fixtures.

Bigger Planks. Fewer Joints. A Truly Elevated Style.


TV 3043 XL Austin Linston

PERFORM 300 XL FABRIC SERIES

Wear Layer 0.2 mm
Thickness 3.0 mm
Size 457.2mm x 914.4 mm
8 pieces/box 3.34 sqm




TV 3043 XL Austin Linston

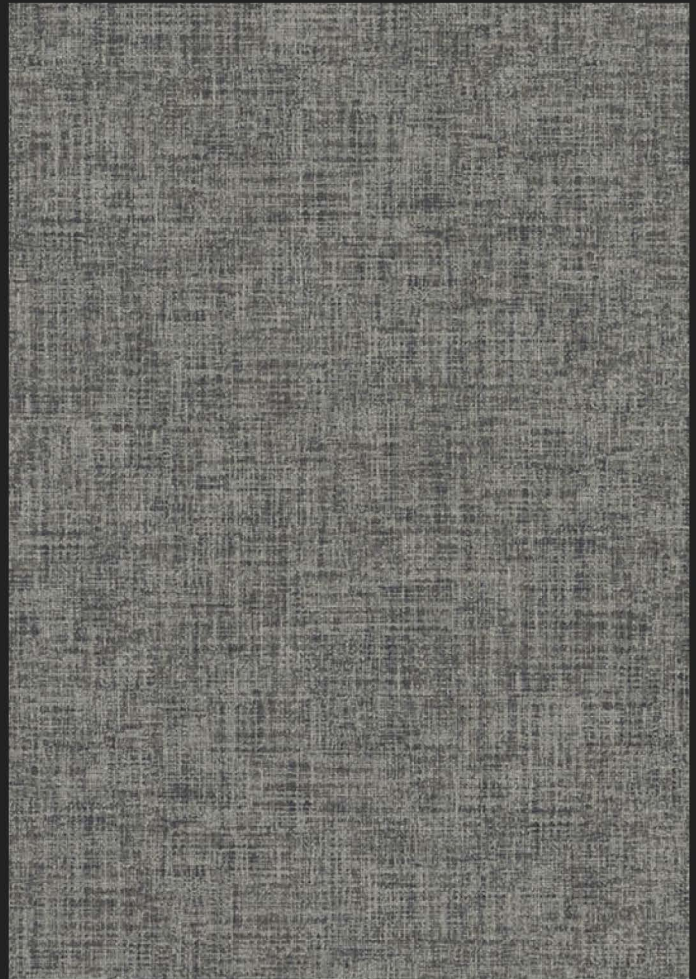

TV 3044 XL Houston Linston



TV 3045 XL Dallas Linston

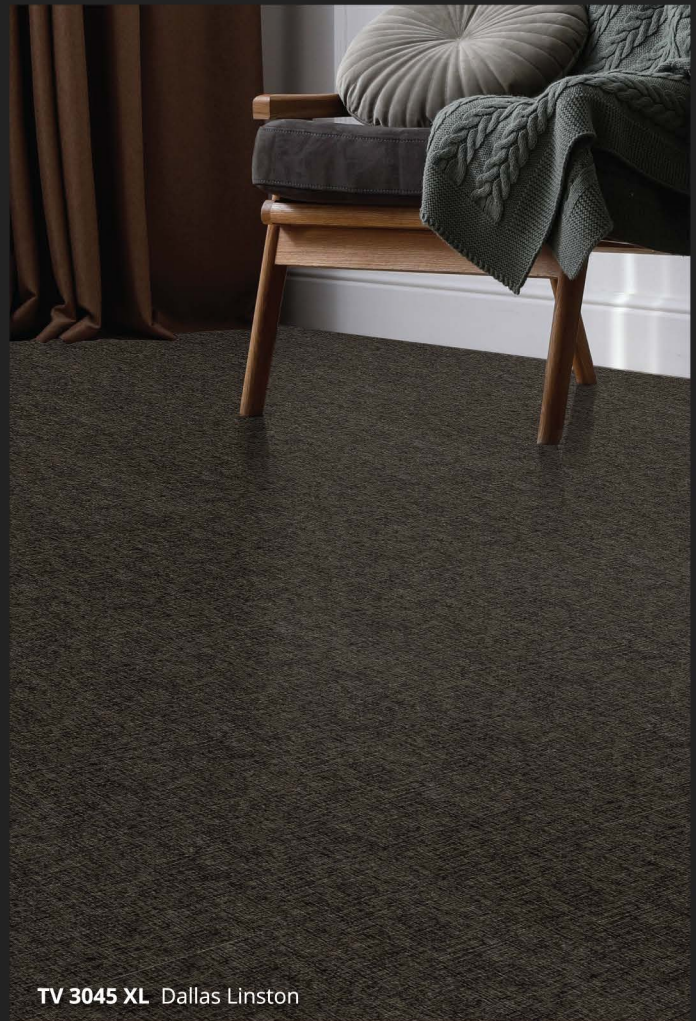

TV 3045 XL Dallas Linston

PERFORM 300 XL

WOOD SERIES

Wear Layer 0.2 mm
Thickness 3.0 mm
Size 228.6 mm x 1219.2 mm
12 pieces/box 3.34 sqm



TV 3034 XL Alaska Park



TV 3035 XL Oslo Sand



TV 3036 XL Malibu Beach



TV 3037 XL Jeju Alley

PERFORM 300 XL

WOOD SERIES

Wear Layer	0.2 mm
Thickness	3.0 mm
Size	228.6 mm x 1219.2 mm
12 pieces/box	3.34 sqm



TV 3038 XL Padang Bay



TV 3039 XL Havana Land


PERFORM 300 XL

STONE SERIES

Wear Layer	0.2 mm
Thickness	3.0 mm
Size	457.2mm x 914.4 mm
8 pieces/box	3.34 sqm



TV 3046 XL White Oasis

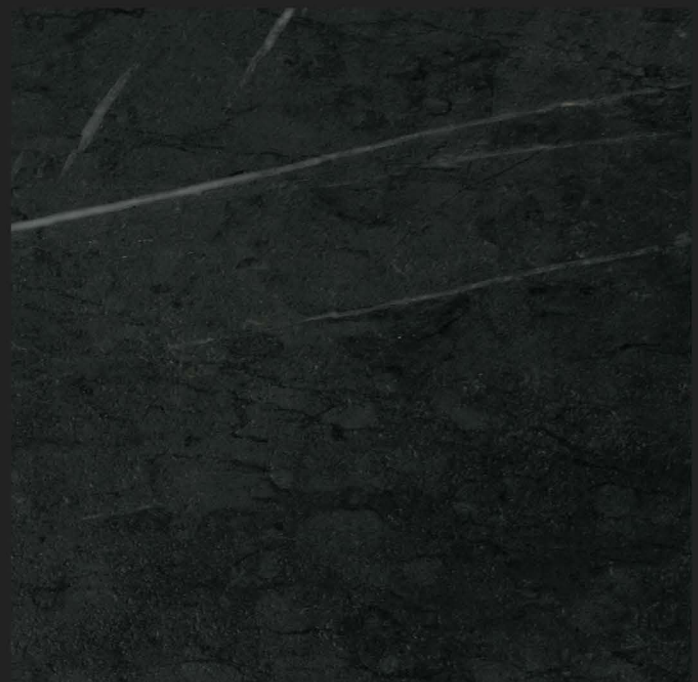

TV 3042 XL Colorado Nero

Technical Data

PROPERTY	TEST METHOD	PASS
Resistance to chemical	EN423: 93	Class 0
Bearing Castor	EN425: 94	✓
Dimension Squareness and Straightness	EN427: 94	✓
Thickness Overall	EN429: 93	✓
Thickness Wear Layer	EN429: 93	✓
Residual Indentation after Static Load	EN433: 94	✓
Dimensional Stability and Curling after Exposure to Heat	EN434: 94	✓
Shrinkage Rate	≤0,25%	✓
Curling	≤2 mm	✓
Abrasion Resistance	EN660-1 /-2	Bend around 20 mm mandrel Shows no sign of cracking
Color Fastness to Light	EN 20 ISO 105B02	6 or above
Toxic Element Test	EN 71-3	✓
Specific Gravity	ASTM D792: 91	✓
Coefficients of Friction	ASTM D1894: 01	✓
Sound Reduction	DIN52210	4 dB
Flammability	EN71-2	✓
Smoke Density	DIN4102 / ASTMD2843-99	Class B1
Electrical Resistance	EN1081 Method C	✓
Fungus Test	ASTM G21: 96	Grade 1
IMO Resolution	MSC61(67) Part 2 MSC61(67) Part 5	✓

PRODUCED UNDER HIGH QUALITY SUPERVISION WITH **ISO 9001 ISO 14001 OHSAS 18001 CE STDS.**



100%
WATERPROOF



EASY TO CLEAN
& MAINTAIN



TERMITE
PROOF



SIMPLE & QUICK
TO INSTALL



ANTI
BACTERIAL

✓ **TRUETOUCH**
TECHNOLOGY

Brings natural feel and texture to life.

*PERFORM 300 XL Wood : 45,44% | PERFORM 300 XL Stone : 45,08%
Khusus untuk produk yang diproduksi oleh PT TACO Anugrah Corporindo.



rumahtaco.id

0812-9978-7735

Scan to contact us
on WhatsApp

